

# APEX™ 700 Specifications

**PORTACOOOL**




## Key Features:


- Merges efficient evaporative cooling, smart digital control, and rugged portability
- 1,400 CFM airflow, 700 sq. ft. cooling capability, 53 dB operation, 60 ft. airflow reach
- Smartphone-enabled CoolSync™ Technology for convenient control and scheduling
- Compact footprint (slim profile) with customized airflow capability
- Purpose-built for garages, workshops, service bays, patios, and industrial use

<b>Electronic Features</b>	Full digital display	CoolSync™ Wi-Fi connectivity
	Smartphone control via app for scheduling and multi-unit management	
	Digital oscillating louvers for airflow direction	
	Digital water-level indicators & performance alerts	
<b>Cooling Capacity</b>	700 sq. ft. up to 30°F temperature reduction	Airflow: 1,400 CFM
	Airflow Reach: 60 ft.	Velocity: 37 MPH
<b>Electrical Characteristics</b>	Voltage / Amperage	120 V / 4 AMP
<b>Fans</b>	Centrifugal fan / blower, variable speed, oscillating louvers	
<b>Water Tank Capacity</b>	22 gallon reservoir with quick refill hatch, 3/4" hose connection (recessed)	
<b>Cooling Method</b>	Water evaporation via media pads (no coils)	
<b>Cooling Efficiency</b>	HydroTek™ Evaporative Media (water-absorption matrix)	
<b>Dimensions</b>	H x D x W (inches)	52" x 24" x 27"
<b>Product Weight</b>	88 lbs. (without water)	
<b>Power Cord</b>	120V compatible power cord (recessed)	
<b>Max. Sound Level</b>	53 dB (whisper-quiet)	

All models come with a 3 year warranty on motor and electrical components.  
The cooler's rotational molded housing comes with an industry-leading lifetime warranty.

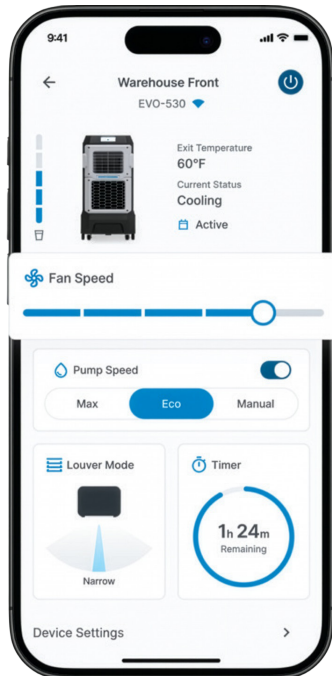

## SLIMMER PROFILE

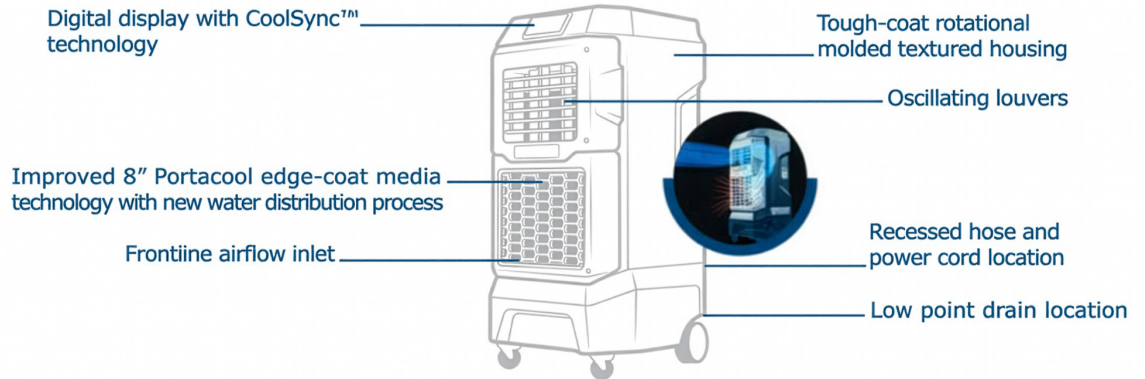

MODEL NUMBER	OPTIMAL COOLING (Sq. Ft.)	VELOCITY (Mph)	AIR FLOW REACH (Ft.)	NOISE (dB)	WATER RESERVOIR (Gallons)	PRODUCT WEIGHT (Without Water)	AIRFLOW (CFMs)	AMP'S	DIMENSIONS (In.)
PACA07001A1	UP TO 700	37	60	53	22	88	1400	4.0	(HEIGHT) 52 (DEPTH) 24 (WIDTH) 27

- \* Standard 120v.
- \* 3 year warranty on motor and electrical components.