


eme Gantry Crane Standard Models

Mobile & Portable: Lift Easily, Anywhere

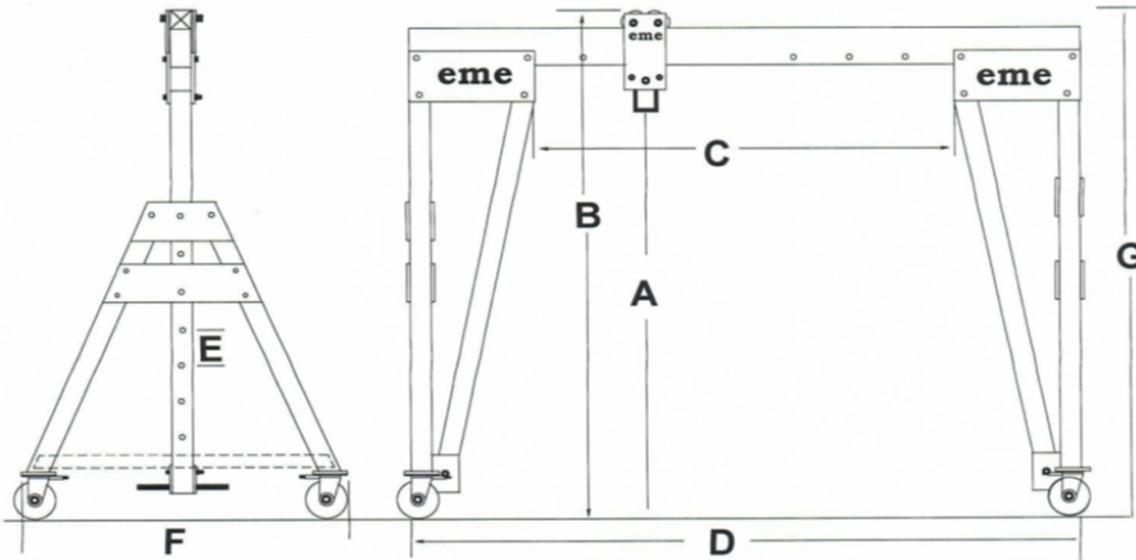

Standard Equipment on All Models

- All Aluminum Construction
- Locking 'Surround-Beam' Trolley
- 4 Position Swivel Locking Casters (roll & swivel)
- Proprietary Box Beam
- Grade L9 Chromate Plated Fasteners
- Height Adjustment Handles

Standard Documentation / Certification/ Safety

- Signed Certificate of Test (crane tested to Proof Load)
- Certified to Roll Loaded
- Engineers Stamped Drawing Provided with each Crane
- 10 Year Warranty on Crane, 2 Years on Casters
- CSA 47.2 Welding
- Mobile Application with Assembly Instructions



| eme Pro Model | Lift Capacity | Standard Beam Length | A | | B | | C | | D | | E | | F | | G | |
|---------------|---------------|----------------------|-------------------------------|------------------------------|------------|------------|-----------------------|---------------|-------------------|---------------------------------|---|--|---|--|---|--|
| | | | Min/Max Height to Lifting Eye | Max Height to Top of Trolley | Clear Span | Wheel Base | Height Adj. Increment | Caster Spread | to Top of Trolley | Assembled Weight ⁽¹⁾ | Prior to Shipment Cell Load Tested of WLL | | | | | |
| 1100R-8 | 1,100 lbs | 8 ft | 66-90 in | 106 in | 5 ft. | 93 in | 6 in | 48 in | 82 in | 235 lbs | 125% | | | | | |
| 2200R-8 | 2,200 lbs | 8 ft | 66-90 in | 106 in | 5 ft. | 93 in | 6 in | 48 in | 82 in | 235 lbs | 125% | | | | | |
| 2200LW-10 | 2,200 lbs | 10 ft | 82-122 in | 138 in | 7 ft. | 117 in | 8 in | 65 in | 98 in | 285 lbs | 125% | | | | | |
| 2200XT-15 | 2,200 lbs | 15 ft | 120-176 in | 191 in | 12 ft. | 117 in | 8 in | 85 in | 135 in | 400 lbs | 125% | | | | | |
| 2200 Max-15 | 2,200 lbs | 15 ft | 164-252 in | 268 in | 12 ft. | 177 in | 8 in | 124 in | 190 in | 435 lbs | 125% | | | | | |
| 4400M-10 | 4,400 lbs | 10 ft | 66-90 in | 106 in | 7 ft. | 117 in | 6 in | 48 in | 82 in | 275 lbs | 125% | | | | | |
| 4400R-10 | 4,400 lbs | 10 ft | 82-122 in | 138 in | 7 ft. | 117 in | 8 in | 65 in | 98 in | 335 lbs | 125% | | | | | |
| 4400T-15 | 4,400 lbs | 15 ft | 98-138 in | 154 in | 12 ft. | 177 in | 8 in | 65 in | 114 in | 365 lbs | 125% | | | | | |
| 4400XT-15 | 4,400 lbs | 15 ft | 120-176 in | 191 in | 12 ft. | 177 in | 8 in | 85 in | 135 in | 400 lbs | 125% | | | | | |
| 4400HELI-15 | 4,400 lbs | 15 ft | 135-191 in | 207 in | 12 ft. | 177 in | 8 in | 85 in | 150 in | 480 lbs | 125% | | | | | |
| 4400MAX-15 | 4,400 lbs | 15 ft | 133-197 in | 213 in | 12 ft. | 177 in | 8 in | 106 in | 149 in | 635 lbs | 125% | | | | | |
| 6600R-15 | 6,600 lbs | 15 ft | 106-154 in | 179 in | 12 ft. | 177 in | 8 in | 73 in | 130 in | 550 lbs | 125% | | | | | |
| 6600MAX-15 | 6,600 lbs | 15 ft | 136-216 in | 240 in | 12 ft. | 177 in | 8 in | 106 in | 160 in | 875 lbs | 125% | | | | | |
| 8800MAX-15 | 8,800 lbs | 15 ft | 136-216 in | 240 in | 12 ft. | 177 in | 8 in | 106 in | 160 in | 885 lbs | 125% | | | | | |
| 11000R-15 | 11,000 lbs | 15 ft | 106-154 in | 179 in | 12 ft. | 177 in | 8 in | 73 in | 130 in | 680 lbs | 125% | | | | | |
| 16500R-15 | 16,500 lbs | 15 ft | 101-143 in | 173 in | 12 ft. | 177 in | 7 in | 81 in | 131 in | 945 lbs | 125% | | | | | |
| 22000R-15 | 22,000 lbs | 15 ft | 97-139 in | 169 in | 12 ft. | 177 in | 7 in | 81 in | 127 in | 1030 lbs | 125% | | | | | |

(1) Excludes weight of the trolley

Contact Information

Phone: 888-679-5283

For Sales:

solutions@easilymovedequipment.com

For Parts:

parts@easilymovedequipment.com