



Applicaton overview	210
Range overview	211
Husqvarna tile saws	212
Diamond blades for tile saws	218
Small diameter tools	218

TILE SAWS/
SMALL
DIAMETER

For people who work with tiles, it goes without saying that precision is crucial to the end result. The efficiency of the machine should never compromise the need for good ergonomics and a reasonable workload. Husqvarna's tile saws are not only efficient, accurate and labor-saving, but also easy to use.

Cutting edge performance.

Delivering products that increase efficiency and enhance ergonomics has been Husqvarna's central focus when developing any product and the TS 60 tile saw is no different.

The TS 60 was built to be the most user-friendly and efficient tile saw available. Developed by listening to requests from tile contractors, this saw will make cutting tile easier from set up to tear down.



Integrated wheels.

Easy, smooth movement of TS 60 blade guard for fast, plunge cutting of tile.



The innovative, patented Jet Stream system keeps water and slurry inside the water pan even while cutting. A stream of water is directed through a channel in the conveyor cart, cooling and lubricating the blade before it cuts the material and minimizes spray and slurry outside the frame of the saw. This keeps the area surrounding the saw free of water spray.



The blade guard easily opens for hassle-free diamond blade changes.



An extra long 26" conveyor cart supports larger tile.



Dual-position miter cut capability, adjustable in seconds.

Depth stop keeps blade at correct depth.



Cart Lock keeps cart in place while transporting to protect the user and saw.

Tile saws – range overview.

APPLICATION	PRODUCT	TECHNICAL SPECIFICATIONS	PAGE														
<ul style="list-style-type: none"> Tile saw featuring a revolutionary water containment system and additional features to aid the contractor. The perfect saw for cutting indoors with little to no mess. Cuts tile and brick up to 20° diagonal or 24" rip cuts. 	Husqvarna TS 60. 	<table border="1"> <tr> <td>Power, electric, hp (kW)</td> <td>14/2 (1.1)</td> </tr> <tr> <td>Voltage, V</td> <td>115</td> </tr> <tr> <td>Blade diameter, in (mm)</td> <td>10 (254)</td> </tr> <tr> <td>Depth of cut, in (mm)</td> <td>2-3/4 (70)</td> </tr> <tr> <td>Diagonal cut, in (mm)</td> <td>20 (508)</td> </tr> <tr> <td>Rip cut, in (mm)</td> <td>24 (600)</td> </tr> <tr> <td>Weight, lbs (kg)</td> <td>79 (36)</td> </tr> </table>	Power, electric, hp (kW)	14/2 (1.1)	Voltage, V	115	Blade diameter, in (mm)	10 (254)	Depth of cut, in (mm)	2-3/4 (70)	Diagonal cut, in (mm)	20 (508)	Rip cut, in (mm)	24 (600)	Weight, lbs (kg)	79 (36)	212
Power, electric, hp (kW)	14/2 (1.1)																
Voltage, V	115																
Blade diameter, in (mm)	10 (254)																
Depth of cut, in (mm)	2-3/4 (70)																
Diagonal cut, in (mm)	20 (508)																
Rip cut, in (mm)	24 (600)																
Weight, lbs (kg)	79 (36)																
<ul style="list-style-type: none"> Ideal for the contractor who needs to cut larger tiles with ease, due to the continuous duty Baldor motor. Comes with a 10" premium blade. Designed to cut 34" tiles and 24" tiles on the diagonal. 	Husqvarna Tilematic® TS 250 X3. 	<table border="1"> <tr> <td>Power, electric, hp (kW)</td> <td>14/2 (1.1)</td> </tr> <tr> <td>Voltage, V</td> <td>115, 115/208-230</td> </tr> <tr> <td>Blade diameter, in (mm)</td> <td>10 (254)</td> </tr> <tr> <td>Depth of cut, in (mm)</td> <td>3-3/4 (95)</td> </tr> <tr> <td>Diagonal cut, in (mm)</td> <td>24 (600)</td> </tr> <tr> <td>Rip cut, in (mm)</td> <td>34 (850)</td> </tr> <tr> <td>Max weight, lbs (kg)</td> <td>150 (68)</td> </tr> </table>	Power, electric, hp (kW)	14/2 (1.1)	Voltage, V	115, 115/208-230	Blade diameter, in (mm)	10 (254)	Depth of cut, in (mm)	3-3/4 (95)	Diagonal cut, in (mm)	24 (600)	Rip cut, in (mm)	34 (850)	Max weight, lbs (kg)	150 (68)	214
Power, electric, hp (kW)	14/2 (1.1)																
Voltage, V	115, 115/208-230																
Blade diameter, in (mm)	10 (254)																
Depth of cut, in (mm)	3-3/4 (95)																
Diagonal cut, in (mm)	24 (600)																
Rip cut, in (mm)	34 (850)																
Max weight, lbs (kg)	150 (68)																
<ul style="list-style-type: none"> This saw is equipped with a strong, continuous duty Baldor motor to finish any job. Perfect for the commercial tile contractor who needs high capacity cutting of tile. Cuts tile and bricks up to 18° diagonal cuts or 24" rip cuts. 	Husqvarna Super Tilematic® TS 250 XL3. 	<table border="1"> <tr> <td>Power, electric, hp (kW)</td> <td>14/2 (1.1)</td> </tr> <tr> <td>Voltage, V</td> <td>115</td> </tr> <tr> <td>Blade diameter, in (mm)</td> <td>10 (254)</td> </tr> <tr> <td>Depth of cut, in (mm)</td> <td>3-3/4 (95)</td> </tr> <tr> <td>Diagonal cut, in (mm)</td> <td>18 (450)</td> </tr> <tr> <td>Rip cut, in (mm)</td> <td>24 (600)</td> </tr> <tr> <td>Weight, lbs (kg)</td> <td>105 (48)</td> </tr> </table>	Power, electric, hp (kW)	14/2 (1.1)	Voltage, V	115	Blade diameter, in (mm)	10 (254)	Depth of cut, in (mm)	3-3/4 (95)	Diagonal cut, in (mm)	18 (450)	Rip cut, in (mm)	24 (600)	Weight, lbs (kg)	105 (48)	216
Power, electric, hp (kW)	14/2 (1.1)																
Voltage, V	115																
Blade diameter, in (mm)	10 (254)																
Depth of cut, in (mm)	3-3/4 (95)																
Diagonal cut, in (mm)	18 (450)																
Rip cut, in (mm)	24 (600)																
Weight, lbs (kg)	105 (48)																

Husqvarna TS 60 Tile Saw.



Height adjustable stand included.
10" Vari-Cut™ Tile blade included.

Our newest tile saw features a revolutionary water containment system and additional features to aid the contractor. The perfect saw for cutting indoors with little to no mess.


Applications.

- Cuts bricks and tile up to 20" diagonal or 24" rip cuts.

Benefits.

- Patented Jet Stream is an innovative water containment system, which keeps water inside the water pan.
- Rolling wheel system with long-lasting Duracon wheels.
- Weighs 79 lbs. - easy to carry.
- Efficiently switches between plunge cuts and miter cuts with ease.
- Extra long 26" cart to better support tile.
- Equipped with Elgard™ which indicates, via the LED, when the machine is overloaded to prevent motor damage and increases motor life.
- Electronic Softstart™ helps starting with normal, slow-acting fuses and increases brush and motor life.
- Integrated wheels in the frame allow saw to be pulled independently, like a roller bag.
- Water flow system efficiently provides clean water and is designed to keep pump protected from slurry, elongating life of the pump.
- Larger blade flanges provide more support for blade core.
- Includes removable cart extension to help support larger tile.
- Height adjustable stand for operator comfort.

Cutting capacities.



Foot switch.



Conditioning stick.

Equipped with Elgard™ LED warning light alerts user when motor is overloading.



Convenient knob allows water to be sent to blade guard for long cuts and miter cuts.

Product specifications.

	TS 60	E
Item no.	966610701	
List price	\$1,199.00	

Technical specifications.

Blade diameter, in (mm)	10 (254)
Depth of cut, in (mm)	2-3/4 (70)
Bladeshaft, rpm	3,175
Power source	Electric
Power, hp (kW)	1-1/2 (1.1)
Engine manufacturer	Husqvarna
Arbor size, in (mm)	5/8 (16)
Rip cut, in (mm)	24 (600)
Diagonal cut, in (mm)	20 (508)
Cutting arm	Cast aluminum
Cutting table	Cast aluminum, rubber top
Voltage, V	115
Cycle	60
Phase	1
Full load amps	14.4
Weight uncrated, lbs (kg)	79 (36)
Weight crated, lbs (kg)	160 (72.5)
Dimensions uncrated, in (mm) LxWxH	39-1/8 x 25 x 21-3/4 (994 x 635 x 552)



Use the QR tag to learn more about the TS 60

Accessories.

		P
A	Foot switch	169543 \$99.00
B	Conditioning sticks - 60 grit	542860087 10.00

Spare parts.

		P
	Drain plug	543046051 \$10.60
	Water pan	510225414 88.00
	Water pump, 110V	525825601 70.00
	Cart extension	522468404 30.00
	Rip guide	522469501 40.00
	Wrench	510225437 4.00



16" x 26" conveyor cart better supports larger tile.

Husqvarna Tilematic® TS 250 X3.



10" Vari-Cut™ Tile blade included. Galvanized pan shown. Also available with stainless steel pan. Shown with optional rolling stand.

This saw is equipped with a strong, continuous duty Baldor motor to finish any job. Perfect for the commercial tile contractor who needs high capacity cutting of tile.


Applications.

- Cuts bricks and tile up to 18" diagonal cuts or 24" rip cuts.

Benefits.

- A large 18" x 16-1/2" conveyor cart supports larger tile.
- Features a 1-1/2 hp Baldor single voltage continuous duty motor that is totally enclosed, fan cooled (T.E.F.C.) and designed exclusively for Husqvarna.
- Choose rust-resistant galvanized pan or rust-proof stainless steel pan for easiest cleaning and maintenance.
- Bladeshaft lock makes blade changes easier.
- Makes spring-assisted plunge cuts for specialized cutting.
- High torque motor facilitates production sawing capability and is both UL and CSA rated.
- Utilizes dual capacitors for increased power efficiency in low voltage starting conditions.
- Saw features a sliding pan for operator's convenience.
- Premium, 6-groove poly V-belts are smoother running with less vibration, reducing belt slippage and transmit more power to the bladeshaft.
- Three holes on support arm allow for fast, easy use of different size blades (6", 8", and 10") without cutting into cart.

Cutting capacities.



45° bullnose miter guide.



Adjustable 90° protractor.



Dual 45° angle guide.



Tile saw accessory group.




Aluminum conveyor cart and rip guide (sold separately).



Conditioning stick.




Conveyor cart extension.



Adapter cord.



Adjustable rolling stand kit.



Folding steel stand.



Conveyor cart wheels, set of four.



Drain plugs, set of four.



Foot switch.

Product specifications.

	TILEMATIC TS 250 X3	TILEMATIC TS 250 X3 STAINLESS STEEL	E
Item no.	965154414	965154412	
List price	\$1,408.00	\$1,570.00	

Technical specifications.

Blade diameter, in (mm)	10 (254)	10 (254)
Depth of cut, in (mm)	3-3/4 (95)	3-3/4 (95)
Bladeshaft, rpm	2,760	2,760
Power source	Electric	Electric
Power, hp (kW)	1-1/2 (1.1)	1-1/2 (1.1)
Engine manufacturer	Baldor	Baldor
Arbor size, in (mm)	5/8 (16)	5/8 (16)
Rip cut, in (mm)	24 (600)	24 (600)
Diagonal cut, in (mm)	18 (450)	18 (450)
Cutting head	Cast aluminum	Cast aluminum
Cutting table	Cast aluminum, vulcanized top	Cast aluminum, vulcanized top
Water pan	Galvanized	Stainless steel
Voltage, V	115	115
Cycle	60	60
Phase	1	1
Full load amps	14.4	14.4
Starting amps	80@115V	80@115V
Weight uncrated, lbs (kg)	105 (48)	105 (48)
Weight crated, lbs (kg)	155 (70)	155 (70)
Dimensions uncrated, in (mm) LxWxD	39-1/8 x 25 x 21-3/4 (994 x 635 x 552)	

Accessories.

		P
A	45° bullnose miter guide	051030 \$30.00
B	Adjustable 90° protractor	051010 35.00
C	Dual 45° angle guide for right or left hand cut	051020 20.00
D	Tile saw accessory group*	171065 59.08
E	Aluminum conveyor cart	542203056 168.10
E	Aluminum rip guide	542203083 20.00
F	Conditioning stick - 60 grit	542860087 10.00
G	Conveyor cart extension	542203037 98.76
H	Adapter cord 20A twist to 15A straight	173120 24.00
I	Adjustable rolling stand kit	542203253 349.00
J	Folding steel stand	542203252 132.00
K	Conveyor cart wheels, set of four	542030049 34.00
L	Drain plug, single	542030386 3.28
M	Drain plug, set of four	169288 11.43
M	Foot switch	169543 99.00

*Includes one adjustable 90° protractor, dual 45° angle guide and 45° bullnose miter guide.

Spare parts.

		P
	Galvanized pan and rails	505436401 \$240.31
	Optional rear wheel kit for rolling stand	542204033 25.00
	Stainless steel pan and rails	505436501 345.00
	Water pump assembly - standard flow	502621302 78.80
	Water tube assembly kit	169596 33.48
	Water tube assembly kit, no backer board, non-display	169564 11.81
	Maintenance parts kit	169888 88.25



A large 18" x 16-1/2" conveyor cart better supports larger tile.

Husqvarna Super Tilematic® TS 250 XL3.



Ideal for the contractor who needs to cut larger tiles with ease, due to the continuous duty Baldor motor. Comes with a 10" super premium blade.


Applications.

- Designed to cut 34" tiles and 24" tiles on the diagonal.

Benefits.

- Available with optional cart kit to fully support 24" tiles.
- 10" blade capacity allows thicker material to be cut.
- Choose rust-resistant galvanized pan or rust-proof stainless steel pan for easiest cleaning and maintenance.
- Ability to make spring-assisted plunge cuts for specialized cutting.
- Bladeshaft lock makes blade changes easier.
- Features a 1-1/2 hp Baldor single or dual voltage continuous-duty motor that is totally enclosed, fan cooled (T.E.F.C.) and designed exclusively for Husqvarna.
- Single voltage models feature dual capacitors to increase power efficiency in low voltage starting conditions.
- Motors meet current UL and CSA requirements.
- Single voltage models have six groove poly V-belts while dual voltage models have premium dual 3VX belts that drive the blade at the proper speed for optimum blade performance.

Cutting capacities.



*Optional 24" cart kit recommended to allow for 24" tile.




Tile saw accessory group.




Aluminum conveyor cart and rip guide (sold separately).




Conditioning stick.



Conveyor cart extension.




24" diagonal cut conveyor cart kit (includes stainless steel rails).



Adapter cord.



Adjustable rolling stand kit.



Folding steel stand.



Conveyor cart wheels, set of four.



Drain plugs, set of four.

Product specifications.

	SUPER TILEMATIC TS 250 XL3	SUPER TILEMATIC TS 250 XL3 DUAL VOLTAGE	SUPER TILEMATIC TS 250 XL3 STAINLESS STEEL
Item no.	965154506	965154507	965154509
List price	\$2,117.00	\$2,369.00	\$2,340.00

Technical specifications.

Blade diameter, in (mm)	10 (254)	10 (254)	10 (254)
Depth of cut, in (mm)	3-3/4 (95)	3-3/4 (95)	3-3/4 (95)
Bladeshft, rpm	2,760	3,880	2,760
Power source	Electric	Electric	Electric
Power, hp (kW)	1-1/2 (1.1)	1-1/2 (1.1)	1-1/2 (1.1)
Engine manufacturer	Baldor	Baldor	Baldor
Dual voltage	No	Yes	No
Arbor size, in (mm)	5/8 (16)	5/8 (16)	5/8 (16)
Rip cut, in (mm)	34 (863)	34 (863)	34 (863)
Diagonal cut, in (mm)	24 (600)	24 (600)	24 (600)
Cutting head	Cast aluminum	Cast aluminum	Cast aluminum
Cutting table	Cast aluminum, vulcanized top	Cast aluminum, vulcanized top	Cast aluminum, vulcanized top
Water pan	Galvanized	Galvanized	Stainless steel
Voltage, V	115	115/208-230	115
Cycle	60	60	60
Phase	1	1	1
Full load amps	14.4	17.2/9.5-8.6	14.4
Starting amps	80@115V	92@115V	80@115V
Weight uncrated, lbs (kg)	132 (60)	150 (68)	132 (60)
Weight crated, lbs (kg)	195 (88)	200 (91)	200 (91)
Dimensions uncrated, in (mm) LxWxH	51-1/4 x 29-7/16 x 22-5/8 (1,302 x 748 x 575)		

Accessories.

	P		P
45° bullnose miter guide	051030	\$30.00	
Adjustable 90° protractor	051010	35.00	
Dual 45° angle guide for right or left hand cut	051020	20.00	
A Tile saw accessory group*	171065	59.00	
B Aluminum conveyor cart	542203056	168.10	
B Aluminum rip guide	542203083	20.00	
C Conditioning stick - 60 grit	542860087	10.00	
D Conveyor cart extension	542203037	98.76	
E Conveyor cart kit - 24" rails, wheels and mounting hardware	505507401	349.00	
F Adapter cord 20A twist to 15A straight	173120	24.00	
G Adjustable rolling stand kit	542203253	349.00	
H Folding steel stand	542203252	132.00	
I Conveyor cart wheels, set of four	542030049	34.00	
J Drain plug, single	542030386	3.28	
J Drain plug, set of four	169288	11.43	
Foot switch	169543	99.00	

*Includes one adjustable 90° protractor, dual 45° angle guide and 45° bullnose miter guide.

Spare parts.

	P		P
Galvanized pan and rails	505066201	\$329.00	
Optional rear wheel kit for rolling stand	542204033	25.00	
Stainless steel pan and rails	505066202	424.44	
Water pump assembly - standard flow	502621302	78.80	
Water tube assembly kit	169596	33.48	
Water tube assembly kit, no backer board, non-display	169564	11.81	



Choose rust-resistant galvanized pan or rust-proof stainless steel for easiest cleaning and maintenance.

TILE SAWS/
SMALL
DIAMETER

TILE SAWS/
SMALL
DIAMETER



A crisp, smooth and chip-free edge is important for tile cutting. Husqvarna diamond blades help users achieve the exact look needed. Whether it is a commercial or residential

application, Husqvarna blades do the work and get it done quickly and efficiently.

Application chart.

MATERIAL	CONTINUOUS RIM			
	SUPERLOK® PORCELAIN +	VARI-CUT™ TILE	SUPERLOK® GLASS +	TSD-C DRI DISC®
GLASS	—	—	●	—
PORCELAIN TILE	●	●	○	○
DENSE FLOOR TILE	●	●	○	●
SOFT CERAMIC TILE	—	—	○	○
MARBLE	●	●	●	●
GRANITE	●	○	●	●
BLUE STONE	●	●	●	●
SLATE	●	●	—	●
PAVERS	—	—	—	—
ROOFING TILE	—	—	—	—
BRICK	—	—	—	—
ABRASIVE MATERIALS	—	—	—	—
Read more on page	220	220	220	221

● = Optimal ● = Good ○ = Acceptable — = Not recommended

SEGMENTED			TURBO	
TXS-S DRI DISC®	TSD-S DRI DISC®	FR3 DISC	BARRACUDA™	TSD-T DRI DISC®
—	—	—	—	—
—	—	—	○	○
—	—	●	○	○
○	○	●	●	●
●	●	○	●	●
●	●	○	●	●
●	●	—	●	●
●	●	—	●	●
○	○	—	○	○
221	222	222	223	223

Husqvarna Superlok® Porcelain +.

HIGH PRODUCTION BLADES

- The Superlok® Porcelain+ blade makes fast, smooth, chip-free cuts. Use this blade to cut porcelain tile, granite and other stone materials.
- A thicker core specification provides straighter, chip-free cutting during high production sawing.
- The total rim height of this blade is .375".



WET CUTTING CONTINUOUS RIM		SUPER PREMIUM	
Size - Inches (mm)	Item No.	List Price	
6 (152) x .060 x 5/8	542761271*	\$69.00	
7 (178) x .060 x 5/8	542761272	83.00	
8 (203) x .060 x 5/8	542761273	99.00	
8 (203) x .070 x 5/8	542761274	109.00	
8 (203) x .060 x 1	542761275	99.00	
10 (254) x .060 x 5/8	542761276	123.00	
10 (254) x .070 x 5/8	542761277	134.00	
10 (254) x .060 x 1	542761278	123.00	

*May be used wet or dry.

Husqvarna Vari-Cut™ Tile.

PORCELAIN TILE BLADES

- A Vari-Cut™ Tile blade is used for chip-free cutting of porcelain tile, granite, quarry tile and dense floor tile with a thin rim for precise, fast cuts.
- The total rim height is .275".



WET CUTTING CONTINUOUS RIM		SUPER PREMIUM	
Size - Inches (mm)	Item No.	List Price	
4 (100) x .060 x 7/8 - 5/8 B	542761281*	\$40.00	
4-1/2 (114) x .060 x 7/8 - 5/8 B	542761458*	51.00	
7 (178) x .060 x 5/8	542761282	70.00	
8 (203) x .070 x 5/8	542761283	77.00	
10 (254) x .070 x 5/8	542761284	94.00	
10 (254) x .070 x 5/8 (50 pack)	542774209	(\$70.94 each) 3,547.00	

*May be used wet or dry.

Husqvarna Superlok® Glass +.

GLASS TILE BLADES

- The Superlok® Glass+ blade is used for fast, chip-free cutting of glass tile with the smoothest edge available.
- The total rim height of this blade is .275".



WET CUTTING CONTINUOUS RIM		SUPER PREMIUM	
Size - Inches (mm)	Item No.	List Price	
6 (152) x .060 x 5/8	542776615	\$89.00	
7 (178) x .065 x 5/8	542776616	100.00	
8 (203) x .065 x 5/8	542776617	123.00	
10 (254) x .085 x 5/8	542776618	144.00	

Husqvarna TSD-C Dri Disc®.

TILE, STONE BLADES

- TSD-C is our most economical blade for dry cutting most ceramic tile, quarry tile, porcelain tile, granite, marble and other similar materials; recommended for grout cleaning between tiles and small to large jobs.
- Total rim height is .200".



DRY OR WET CUTTING CONTINUOUS RIM		QUALITY	
Size - Inches (mm)	Item No.	List Price	
3-3/8 (85) x .065 x 15mm	542761256	\$18.00	
4 (100) x .060 x 7/8 - 20mm - 5/8 B	542761257	18.00	
4-1/2 (114) x .060 x 7/8 - 20mm - 5/8 B	542761258	23.00	
5 (127) x .060 x 7/8 - 20mm - 5/8 B	542761259	32.00	
7 (178) x .060 x 5/8	542761261	43.00	
8 (203) x .060 x 5/8	542761262	47.00	
10 (254) x .060 x 5/8	542761264	70.00	
4 (100) x .060 x 7/8 - 20mm - 5/8 B (10 pack in display box)	542761324	(\$13.90 each) 139.00	
4-1/2 (114) x .060 x 7/8 - 20mm - 5/8 B (10 pack in display box)	542761325	(\$19.10 each) 191.00	

Husqvarna TXS-S Dri Disc®.

HARD MATERIAL BLADES

- TXS-S blade will fast cut a wide variety of materials including concrete, brick, masonry and stone.
- Designed for small to medium jobs with a total segment height of .350" diamond depth.



DRY OR WET CUTTING LASER WELDED		SUPER PREMIUM	
Size - Inches (mm)	Item No.	List Price	
4 (100) x .085 x 7/8 - 20mm - 5/8 B	542774901	\$36.00	
4-1/2 (114) x .085 x 7/8 - 20mm - 5/8 B	542761450	46.00	
5 (127) x .085 x 7/8 - 20mm - 5/8 B	542761451	49.00	
6 (152) x .085 x DM - 7/8 - 5/8 B	542761452	59.00	
7 (178) x .090 x DM - 7/8 - 5/8 B	542774902	64.00	
8 (203) x .090 x DM - 7/8 - 5/8 B	542761453	83.00	
9 (230) x .095 x 7/8	542761454	89.00	
10 (254) x .095 x 7/8 - 5/8 B	542761455	116.00	
4 (100) x .085 x 7/8 - 20mm - 5/8 B (10 pack)	542774903	(\$29.40 each) 294.00	
4-1/2 (114) x .085 x 7/8 - 20mm - 5/8 B (10 pack)	542761164	(\$39.00 each) 390.00	
7 (178) x .090 x DM - 7/8 - 20mm - 5/8 B (10 pack)	542774904	(\$53.50 each) 535.00	

TILE SAWS/
SMALL
DIAMETER

TILE SAWS/
SMALL
DIAMETER

Husqvarna TSD-S Dri Disc®

HARD MATERIAL BLADES

- The TSD-S is our most affordable segmented blade for fast cutting a wide variety of materials including concrete, masonry, brick and stone.
- Total segment height of this blade is .275" diamond depth.



DRY OR WET CUTTING DIFFUSION BONDED		PREMIUM		
Size - Inches (mm)	Item No.			List Price
4 (100) x .080 x 7/8 - 20mm - 5/8 B	542761408			\$18.00
4-1/2 (114) x .080 x 7/8 - 20mm - 5/8 B	542761409			23.00
5 (127) x .080 x 7/8 - 20mm - 5/8 B	542761410			32.00
6 (152) x .095 x 7/8 - 5/8 B	542761411			39.00
7 (178) x .095 x DM - 7/8 - 5/8 B	542761412			46.00
8 (203) x .095 x DM - 7/8 - 5/8 B	542761413			53.00
9 (230) x .100 x 7/8 - 5/8 B	542761414			59.00
10 (254) x .100 x DM - 7/8 - 5/8 B	542761415			75.00
4 (100) x .080 x 7/8 - 20mm - 5/8 B (10 pack in display box)	542761439		(\$13.90 each)	139.00
4-1/2 (114) x .080 x 7/8 - 20mm - 5/8 B (10 pack in display box)	542761328		(\$19.10 each)	191.00

FR3 Dri Disc®

METAL CUTTING BLADES

- The FR3 blade is specially recommended when free cutting any material is a critical requirement.
- The blade cuts most hard metals, PVC, tile backer boards, steel and roofing tiles.
- One layer of brazed diamonds and made with brazed diamond technology.



DRY OR WET CUTTING BRAZED DIAMONDS		PREMIUM		
Size - Inches (mm)	Item No.			List Price
4 (100) x .080 x 7/8 - 5/8 B	542773402			\$59.00
4-1/2 (114) x .080 x 7/8 - 5/8 B	542773403			68.00
6 (152) x .090 x DM 7/8 - 5/8 B	542766306			105.00
6 (152) x .090 x 1DP - 20mm B	542766346			108.00
7 (178) x .095 x DM - 7/8 - 5/8 B	542773404			112.00
10 (254) x .095 x D/7 - 7/8 - 5/8 B	542767276			184.00

Husqvarna Barracuda™

GENERAL PURPOSE BLADES

- The Barracuda™ blade is for cutting almost any masonry, tile, stone or hard concrete material.
- It is a fast, smooth cutting blade with a total rim height of .400".
- Flush cut holes on diameters of 4" to 7".



DRY OR WET CUTTING CONTINUOUS RIM		SUPER PREMIUM		
Size - Inches (mm)	Item No.			List Price
4 (100) x .085 x 7/8 - 20mm - 5/8 B	542761426			\$62.00
4-1/2 (114) x .085 x 7/8 - 20mm - 5/8 B	542761427			67.00
5 (127) x .085 x 7/8 - 20mm - 5/8 B	542761428			85.00
6 (152) x .085 x DM - 7/8 - 5/8 B	542761429			93.00
7 (178) x .085 x DM - 7/8 - 5/8 B	542761430			103.00
8 (203) x .095 x DM - 7/8 - 5/8 B	542761431			111.00
9 (230) x .100 x 7/8 - 5/8 B	542761432			135.00
10 (254) x .100 x 7/8 - 5/8 B	542761433			145.00

Husqvarna TSD-T Dri Disc®

GENERAL PURPOSE BLADES

- Use the TSD-T blade for fast, smooth cutting of a variety of materials, including stone, tile, brick, concrete and masonry.
- This blade gives turbo performance at an affordable price.
- The total rim height of this blade is .275" diamond depth.



DRY OR WET CUTTING CONTINUOUS RIM		QUALITY		
Size - Inches (mm)	Item No.			List Price
4 (100) x .080 x 7/8 - 20mm - 5/8 B	542761416			\$18.00
4-1/2 (114) x .080 x 7/8 - 20mm - 5/8 B	542761417			23.00
5 (127) x .080 x 7/8 - 20mm - 5/8 B	542761418			32.00
6 (152) x .080 x 7/8 - 20mm - 5/8 B	542761419			39.00
7 (178) x .095 x DM - 7/8 - 5/8 B	542761420			46.00
8 (203) x .095 x DM - 7/8 - 5/8 B	542761421			53.00
9 (230) x .100 x 7/8	542761422			59.00
10 (254) x .110 x 7/8 - 5/8 B	542761423			75.00
4 (100) x .080 x 7/8 - 20mm - 5/8 B (10 pack in display box)	542761326		(\$13.90 each)	139.00
4-1/2 (114) x .080 x 7/8 - 20mm - 5/8 B (10 pack in display box)	542761327		(\$19.10 each)	191.00

Flush Mount Adapter.

5/8"-11 Threaded flush mount adapter	542420404	\$24.00
--------------------------------------	-----------	---------



Blade Bushings.

60mm x 1", .087" thickness	542380205	\$9.00
50mm x 1", .087" thickness	542380209	9.00



Threaded Adapter.

7/8" x 5/8"-11 Threaded adapter	542751356	\$12.00
---------------------------------	-----------	---------



Husqvarna Profile Wheels.


MARBLE, GRANITE

- Profile Wheels are for commercial and residential applications of natural stones as well as most synthetic materials.
- This blade can be used for decorative edging jobs in four popular shapes: 3/8" radius, 1/2" radius, 45° bevel, and ogee.



WET CUTTING		PREMIUM		
Size - Inches (mm)	Spec.	Item No.	List Price	
6 (152) x 5/8 Arbor, 3/8" Radius	3/8" Radius	542761302	\$149.00	
6 (152) x 5/8 Arbor, 1/2" Radius	1/2" Radius	542761303	149.00	
6 (152) x 5/8 Arbor, 45° Bevel	45° Bevel	542761304	149.00	
6 (152) x 5/8 Arbor, Ogee	Ogee	542761305	149.00	
8 (201) x 5/8 Arbor, 3/8" Radius*	3/8" Radius	542751613	268.00	
8 (201) x 5/8 Arbor, 1/2" Radius*	1/2" Radius	542751614	268.00	

* TS 60 Tile Saw requires an 8 inch profile wheel.

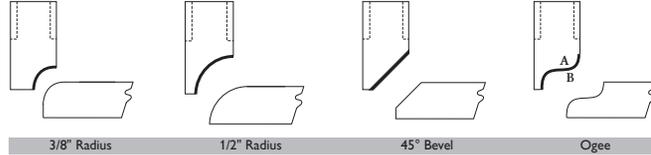

Wheels are 1/2" wide.
Ogee dimensions:
A - 5/32" convex radius
B - 3/16" concave radius

Husqvarna DCG Turbo Rim Diamond Cup Wheels.

STONE, TILE, PORCELAIN, REFRACTORY, LIGHT-DUTY MASONRY, CONCRETE

- For smooth polishing and finishing of stone, tile, porcelain, refractory, light-duty masonry and concrete.
- Total rim height is .200".



WET OR DRY CUTTING PROFILE WHEEL		SUPER PREMIUM		
Size - Inches (mm)	Type	Item No.	List Price	
4 (100) x 5/8-11 DCG Turbo cup	Coarse	542761306	\$112.00	
4 (100) x 5/8-11 DCG Turbo cup	Medium	542761307	112.00	
4 (100) x 5/8-11 DCG Turbo cup	Fine	542761441	112.00	

Husqvarna DT Series Tuckpoint.

GENERAL PURPOSE BLADES

- The DT5+ soft bond blade is used to quickly remove mortar between brick and block.
- DT8+ hard bond blade has a longer life when used for mortar removal between brick and block.
- The total segment height is .400".



DRY OR WET CUTTING LASER WELDED		PREMIUM		
Size - Inches (mm)	Item No.	DT5+	DT8+	List Price
4 (100) x .250 x 7/8 - 5/8 B	542774592	542774622		\$44.00
4-1/2 (114) x .250 x 7/8 - 5/8 B	542774593	542774623		50.00
5 (127) x .250 x 7/8 - 5/8 B	542774594	542774624		61.00
7 (178) x .250 x DM - 7/8 - 5/8 B	542774595	542774625		78.00

Husqvarna DTR5 Tuckpoint.

GENERAL PURPOSE BLADES

- The DTR5 blade features a double row of tuckpointing for aggressive mortar removal.
- A total segment height of .400".



DRY OR WET CUTTING DIFFUSION BONDED		SUPER PREMIUM		
Size - Inches (mm)	Item No.			List Price
4 (100) x .250 x 7/8 - 5/8 B	542774613			\$52.00
4-1/2 (114) x .250 x 7/8 - 5/8 B	542774614			57.00
5 (127) x .250 x 7/8 - 5/8 B	542774615			72.00
7 (178) x .250 x DM - 7/8 - 5/8 B	542774616			90.00