

SERIES 2100 CONTRACTOR LIFT



AN SFE GROUP BRAND

PRODUCT BROCHURE

www.SUMNER.com



The **Specialized Fabrication Equipment Group** (in short: **S.F.E. Group**) was founded in 2019 after the merger of three world leading OEM's in the field of pipe fabrication tooling and machinery: B&B Pipe and Industrial Tools LLC (USA), Mathey Dearman Inc. (USA) and TAG Pipe Equipment Specialists (UK). In a time span of 5 years, another 4 renowned and market leading companies were acquired and added to the **S.F.E. Group** portfolio: Axxair (France, 2022), Magnatech (USA, 2023), Climax (USA, 2023) and SUMNER (USA, 2025).

The vision and philosophy of the **S.F.E. Group** is to offer globally a comprehensive innovative and cost-effective range of specialized fabrication, welding and machining equipment and derived rental solutions, for a wide range of applications within all critical industries, while optimizing performance, efficiency and safety.

Leveraging over 200 years of combined experience in engineering, manufacturing, and field applications, the **S.F.E. Group** is committed to driving innovation. Through continuous product development and strategic acquisitions, the **S.F.E. Group** is actively growing its portfolio and expanding its global presence to meet the demands of industries around the world. Currently, the **S.F.E. Group** consists of 12 complimentary brands, each supporting the others in delivering cutting-edge solutions.


With offices and warehousing on 5 continents, 400+ employees and more than 500 partnerships and distributors worldwide, **S.F.E. Group** prides itself on consistently offering the highest standards of both product quality and service locally to all its customers.

S.F.E. Group looks forward to welcoming you into its global network as a partner, distributor or end user customer and remains at your disposal at any time.

Contact Americas: sales@sfe-brands.com

Contact International: sales-int@sfe-brands.com

S.F.E. GROUP GLOBAL PRESENCE

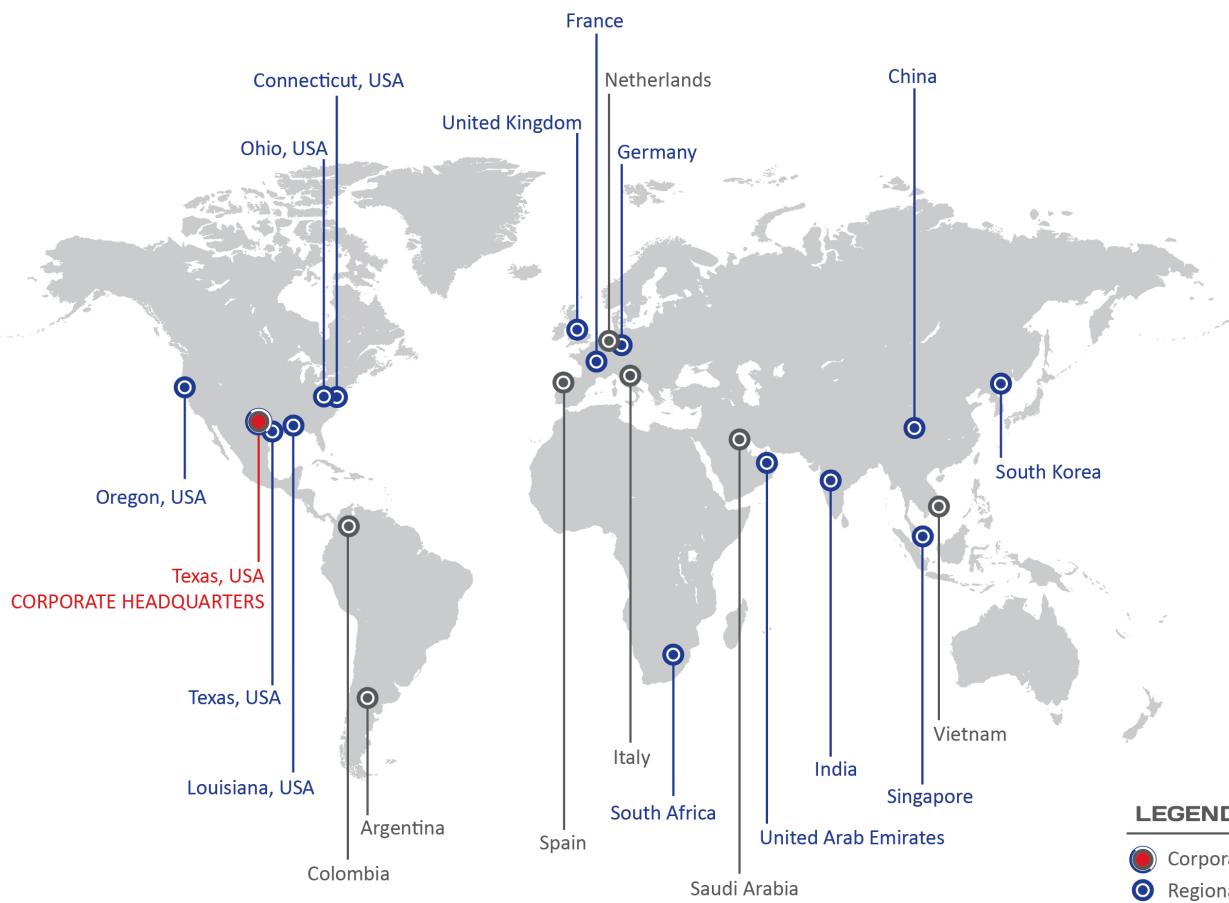

LEGEND

- Corporate Headquarters
- Regional Offices
- ◎ Representation



INTRODUCING SUMNER MATERIAL LIFTS



SUMNER Material Lifts is a world leading brand in the material handling and construction industries, renowned for its innovative, durable, and user-friendly solutions. Founded in 1965 and now a part of the Specialized Fabrication Equipment Group (in short S.F.E. Group), **SUMNER Material Lifts** has built a global reputation for providing high-quality lifting equipment. Designed with safety and efficiency in mind, **SUMNER Material Lifts** products are widely used by professionals in mechanical contracting, plumbing, HVAC, welding, and electrical installation.

SUMNER Material Lifts' product line includes a broad range of lifting tools such as material lifts, duct lifts, Roust-A-Bouts, gantries, and heavy-duty hoists, all engineered to meet the demanding requirements of job sites around the world. All equipment is known for ease of use, robust construction, and industry-leading safety features, making it the preferred choice for both large-scale industrial projects and everyday construction needs.

With a long tradition of quality, reliability and value and a strong commitment to innovation and customer satisfaction, **SUMNER Material Lifts** continues to set the standard in lifting and material handling solutions.

In conjunction with all other S.F.E. Group portfolio's brands, **SUMNER Material Lifts** continues to lead the way in lifting and fabrication solutions, delivering tools that elevate the operator's standard of work.

SUMNER Material Lifts products are always nearby available within the S.F.E. Group global network and can be consulted on the dedicated website: www.SUMNER.com

INDUSTRIES SERVED



CONSTRUCTION




INFRASTRUCTURE




MANUFACTURING & FABRICATION



OIL & GAS

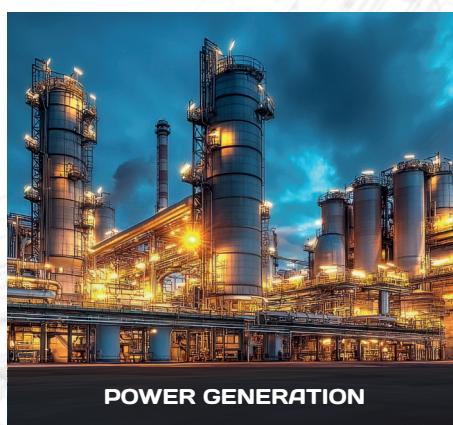

POWER GENERATION

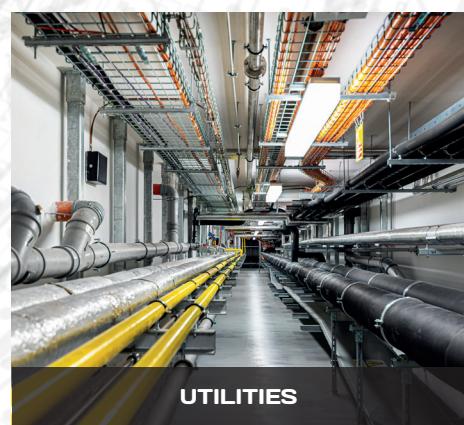

UTILITIES

OUR BRANDS



Our group policy is one of continuous improvements and acquisitions. Products and data tables are subject to change and may vary from those illustrated. Copyright © 2025 Specialized Fabrication Equipment Group, All rights reserved.



The Series 2100 Contractor Lift is specifically designed for the construction, HVAC, and industrial sectors where durability, portability, and precision lifting are essential. It supports up to 650 lbs / 294 kg and offers lift heights of 12ft / 3.66 m, 18 ft / 5.49 m and 24ft / 7.32 m, this series meets the challenges of modern job sites with ease.

Designed to pass through standard doorways and integrate seamlessly with other SUMNER Material Lifts accessories, the SERIES 2100 features an internal cable system for enhanced operator safety and a lifting eye for easy crane deployment. The addition of a pulley guard, plunger pins, and reversible forks all ensure maximum adaptability, while the unit's ability to break down quickly supports efficient site transitions.

SPECIFICATIONS

- Handles up to 650 lbs / 295 kg
- Reaches 12 - 24 ft / 3.66 - 7.32 m in height
- Internal cable routing for improved safety
- Reversible forks to extend lifting range
- 360° pulley guard protects load cable
- Plunger pins eliminate loose parts and tools
- Easily collapses for transport and storage
- Integrated lifting eye for overhead movement
- Compatible with a wide range of accessories
- Available in powder-coated and galvanized models



OPTIONAL FEATURES FOR SUMNER 2000 & 2100 SERIES LIFTS*



Boom with Mobile Base (Part No. 783642) is ideal for overhead lifting or pipe installation.

It features four spring-loaded positioners, 40" / 100 cm reach, and five hook positions supporting 650 - 200 lbs / 300 - 90 kg



Pipe Cradle Platform (Part No. 783705)

Excellent for ducts, pipes, or other HVAC applications. Slides over standard forks.

Packaged in sets of two.



Fork Extensions (Part No. 783691) extend forks

from 28 - 42" / 71 - 106 cm at a button press, reducing capacity to 200 lbs / 90 kg. Another button retracts them for internal storage.



Steering Handle (Part No. 786695)

The optional steering handle improves the lift's maneuverability. With the push of a button, the handle folds out of the operator's way.



Two-Speed Winch Kit (Factory-Installed Part

No. 783765) provides standard and high-speed settings, positioning forks twice as fast. Compatible with 2100 Series lifts (serial 9433+). Field-installation kit: Part 783761.

Optional safety brakes - each mast and mobile base can be factory-equipped with a gravity-activated safety brake that supports the load to help prevent any slack in the cable.



PART NO.	DESCRIPTION
783881	2000 Series Mast Brake Kit
783663	2100 Series Mast Brake Kit

*Includes safety brake and all hardware for one mast section only.

OPERATIONAL DIMENSIONS

MODEL NO.	HEIGHT STOWED		LENGTH STOWED		HEIGHT OPERATING		LENGTH OPERATING		BASE WIDTH		WIDTH WITH STABILIZER LEGS		GROUND CLEARANCE		LOAD HEIGHT MIN.		MAX HEIGHT FORKS DOWN		MAX HEIGHT FORKS REVERSED	
2112	84"	2.13 m	34"	0.86 m	62"	1.57 m	31 1/4"	0.8 m	74"	1.88 m	2 1/2"	64 mm	6"	152 mm	10' 11 1/2"	3.3 m	12' 11 1/2"	3.9 m	11' 7 1/2"	3.5 m
2118	84"	2.13 m	34"	0.86 m	73"	1.84 m	31 1/4"	0.8 m	74"	1.88 m	2 1/2"	64 mm	6"	152 mm	16' 4 1/2"	5 m	18' 4 1/2"	5.6 m	16' 2 1/2"	4.9 m
2124	84"	2.13 m	34"	0.86 m	73"	1.84 m	31 1/4"	0.8 m	74"	1.88 m	2 1/2"	64 mm	6"	152 mm	21' 9 1/2"	6.6 m	23' 9 1/2"	7.2 m	20' 9 1/2"	6.3 m

MODEL NO.	PART NO.	DESCRIPTION	FOOTPRINT		LIFTING HEIGHT		LOAD CAPACITY											
2112	783650	2112 Contractor Lift	62" x 74"		0.8 x 1.88 m		12 ft		3.66 m		650 lbs		295 kg					
2118	783651	2118 Contractor Lift	31 1/4" x 74"		0.8 x 1.88 m		18 ft		5.49 m		650 lbs		295 kg					
2124	783652	2124 Contractor Lift	31 1/4" x 74"		0.8 x 1.88 m		24 ft		7.32 m		650 lbs		295 kg					
2112G	783225	2112 Contractor Lift - Galvanized	62" x 74"		0.8 x 1.88 m		12 ft		3.66 m		650 lbs		295 kg					
2118G	783226	2118 Contractor Lift - Galvanized	31 1/4" x 74"		0.8 x 1.88 m		18 ft		5.49 m		650 lbs		295 kg					
2124G	783227	2124 Contractor Lift - Galvanized	31 1/4" x 74"		0.8 x 1.88 m		24 ft		7.32 m		650 lbs		295 kg					

OPTIONAL ACCESSORIES

2000MBK	783663	Mast Brake Kit	n/a						
PCRADLE	783705	Pipe Cradle (pair)	n/a						
BOOMA	783642	Boom Assembly	n/a						
TA	786320	Tray Assembly	n/a						
CFEXTKIT	783691	Fork Extension Kit	n/a						
2SWHKIT	783765	Two Speed Winch Handle Kit (2100 only)	n/a						

SHIPPING DIMENSIONS

MODEL NO.	PART NO.	DESCRIPTION	SHIPPING WEIGHT	SHIPPING DIMENSIONS
2112	783650	2112 Contractor Lift	284 lbs	129 kg 40 x 37 x 88" 1,016 x 940 x 2,235 mm
2118	783651	2118 Contractor Lift	371 lbs	168 kg 40 x 37 x 88" 1,016 x 940 x 2,235 mm
2124	783652	2124 Contractor Lift	414 lbs	188 kg 40 x 37 x 88" 1,016 x 940 x 2,235 mm
2112G	783225	2112 Contractor Lift - Galvanized	284 lbs	129 kg 40 x 37 x 88" 1,016 x 940 x 2,235 mm
2118G	783226	2118 Contractor Lift - Galvanized	371 lbs	168 kg 40 x 37 x 88" 1,016 x 940 x 2,235 mm
2124G	783227	2124 Contractor Lift - Galvanized	414 lbs	188 kg 40 x 37 x 88" 1,016 x 940 x 2,235 mm

OPTIONAL ACCESSORIES

2000MBK	783663	Mast Brake Kit	n/a	n/a	n/a	n/a	n/a	n/a
PCRADLE	783705	Pipe Cradle (pair)	n/a	n/a	n/a	n/a	n/a	n/a
BOOMA	783642	Boom Assembly	n/a	n/a	n/a	n/a	n/a	n/a
TA	786320	Tray Assembly	n/a	n/a	n/a	n/a	n/a	n/a
CFEXTKIT	783691	Fork Extension Kit	n/a	n/a	n/a	n/a	n/a	n/a
2SWHKIT	783765	Two Speed Winch Handle Kit (2100 only)	n/a	n/a	n/a	n/a	n/a	n/a

PART NO	780420		DESCRIPTION: Adjust-A-Fit™	PART NO	780425		DESCRIPTION: Adjust-A-Flange™

FIT-UP PRO
By Matney Osman



When used in combination with FIT-UP PRO's Adjust-A-Fit™ (Part No 780420), and the FIT-UP PRO's Adjust-A-Flange™ (Part No 780425) the Series 2000 / 2100 Lifts can handle irregular objects to position them easily in place.

DIMENSIONS - SERIES 2000		2010		2015		2020		2025	
Height (folded)	76"	1.93 m	1.93 m						
Length (folded)	34"	0.86 m	0.86 m						
Height (operational)	76"	1.93 m	1.93 m						
Length (operational)	62"	1.57 m	62"	1.57 m	73"	1.84 m	73"	1.84 m	1.84 m
Base width	31¼"	0.80 m	0.80 m						
Width with stabilizer legs	74"	1.88 m	1.88 m						
Ground clearance	2½"	6.4 cm	6.4 cm						
Minimum loading height	6"	15.2 cm	15.2 cm						
Max height (forks down)	9 ft 7½"	2.9 m	14 ft 2¾"	4.3 m	18 ft 10"	5.7 m	23 ft 5¾"	7.1 m	
Max height (forks folded)	11 ft 7¾"	3.5 m	16 ft 2½"	4.9 m	20 ft 9¾"	6.3 m	25 ft 5¾"	7.7 m	

DIMENSIONS - SERIES 2100		2112		2118		2124	
Height (folded)	84"	2.13 m	84"	2.13 m	84"	2.13 m	
Length (folded)	34"	0.86 m	34"	0.86 m	34"	0.86 m	
Height (operational)	84"	2.13 m	84"	2.13 m	84"	2.13 m	
Length (operational)	62"	1.57 m	73"	1.84 m	73"	1.84 m	
Base width	31¼ "	0.80 m	31¼"	0.80 m	31¼"	0.80 m	
Width with stabilizer legs	74"	1.88 m	74"	1.88 m	74"	1.88 m	
Ground clearance	2½"	6.4 cm	2½"	6.4 cm	2½"	6.4 cm	
Minimum loading height	6"	15.2 cm	6"	15.2 cm	6"	15.2 cm	
Max height (forks down)	10 ft 11¾"	3.3 m	16 ft 4⁵/₈"	5.0 m	21 ft 9⁵/₈"	6.6 m	
Max height (forks folded)	12 ft 11¾"	3.9 m	18 ft 4³/₈"	5.6 m	23 ft 9⁵/₈"	7.2 m	

As a contractor lift without equal, the 2100 Series features a taller mast to reach the desired working heights while requiring fewer mast sections.

As a result, the 2100 Series lift is less expensive and lighter. The base, forks, winch, etc., are the same as those of the 2000 Series.



SERIES 2100

PART NO	DESCRIPTION	MAXIMUM HEIGHT		LIFTING CAPACITY		LIFT WEIGHT		SHIPPING WEIGHT	
		FEET	METRES	LBS	KG	LBS	KG	LBS	KG
783650	Contractor Lift 2112	12 ft 11 $\frac{3}{8}$ "	3.9	650	300.0	252	114.5	287	130.5
783651	Contractor Lift 2118	18 ft 4 $\frac{3}{8}$ "	5.6	650	300.0	321	145.9	356	161.8
783652	Contractor Lift 2124	23 ft 9 $\frac{3}{8}$ "	7.2	650	300.0	366	166.0	399	181.4




**GLOBAL LEADER IN SPECIALIZED
MACHINING, WELDING AND
FABRICATION EQUIPMENT**



SPECIALIZED FABRICATION EQUIPMENT
GROUP

Contact Americas
sales@sfe-brands.com



Contact International
sales-int@sfe-brands.com



CLIMAX

B&B SUMNER

TAG
PIPE EQUIPMENT SPECIALISTS

CALDER

H&S TOOL

BORTECH

MATHEY DEARMAN

PPM
PIPE PULSE MASTERS

AXXAIR

FIT-UP PRO
By Mathey Deaman

MAGNATECH

SUMNER
MATERIAL LIFTS

Our group policy is one of continuous improvements and acquisitions. Products and data tables are subject to change and may vary from those illustrated. Copyright © 2025 Specialized Fabrication Equipment Group, All rights reserved.