


SER HEAVY DUTY ELECTRIC CHAIN HOIST SER



SER Line drawing 1/4 - 2 tonnes

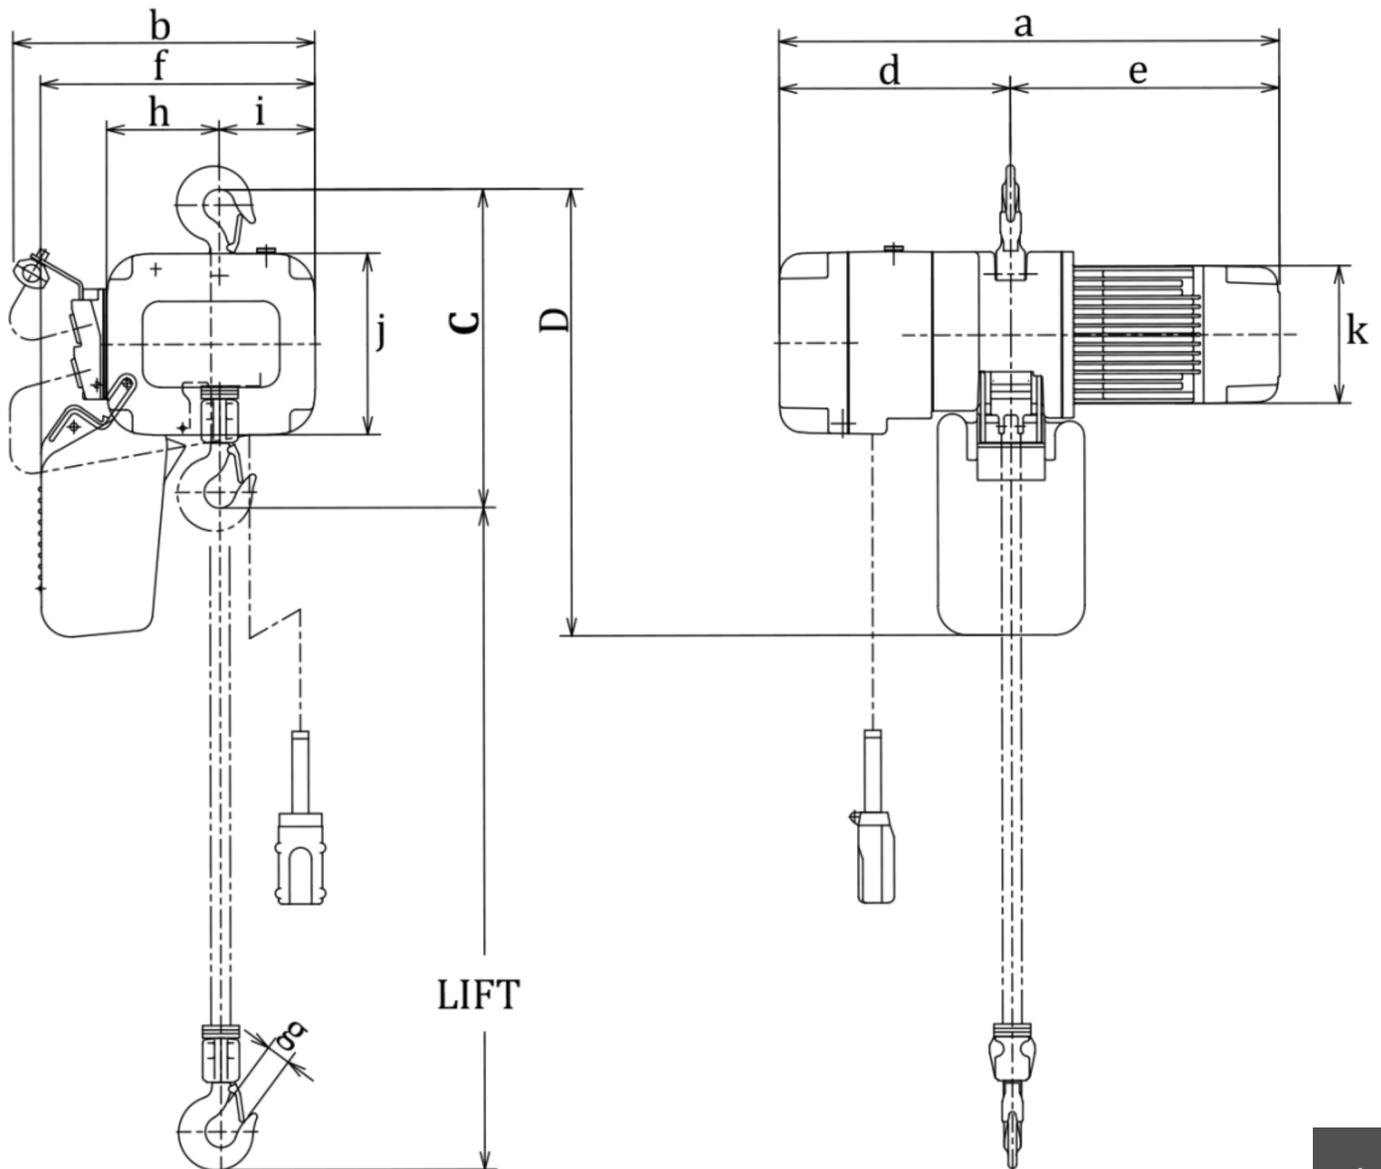

Hook Mount, *For informational purposes only, contact Kito for dimensional drawing

Dimensions



| Capacity (tonne) | Model | D | a | b | C (Inches) | d. | e | f | j | h | i | g | k |
|------------------|---------|-----|-----|------|------------|-----|-----|-----|-----|-----|-----|----|-----|
| 1/4 | SER003S | 450 | 565 | 330 | 14 | 264 | 301 | 263 | 191 | 102 | 98 | 24 | 156 |
| 1/2 | SER005L | 450 | 565 | 330 | 14 | 264 | 301 | 263 | 191 | 102 | 98 | 24 | 156 |
| 1/2 | SER005S | 480 | 590 | 350 | 14.5 | 270 | 320 | 262 | 214 | 120 | 103 | 24 | 164 |
| 1 | SER010L | 490 | 590 | 350 | 16 | 270 | 320 | 262 | 214 | 120 | 103 | 31 | 164 |
| 1 | SER010S | 620 | 683 | 420 | 17 | 316 | 367 | 378 | 247 | 154 | 131 | 31 | 187 |
| 2 | SER020L | 650 | 683 | 4220 | 22.5 | 316 | 367 | 378 | 247 | 154 | 131 | 37 | 187 |
| 3 | SER030C | 890 | 683 | 420 | 29.5 | 316 | 367 | 334 | 247 | 209 | 76 | 44 | 187 |

* All measurements in inches (mm). Please confirm specifications with technical support before purchase.

Specifications



| Capacity (tonne) | Model | Headroom (in) | Standard Lift (ft) | Speed (ft/min) | | Motor | | | Load Chain Code | Load Chain Falls | Ship Weight (lbs) | Weight per Additional 5ft of Lift (lbs) |
|------------------|---------|---------------|--------------------|----------------|--------------------|-------------|---------------------|------|-----------------|------------------|-------------------|---|
| | | | | Hoist Lifting | Trolley Traversing | Output (HP) | Current Draw (amps) | | | | | |
| | | | | | | | 115V | 230V | | | | |
| 1/4 | SER003S | 14 | 10 | 14 | . | 0.34 | 7.7 | 3.9 | KER050 | 1 | 82 | 1.85 |
| 1/2 | SER005L | 14 | 10 | 7 | . | 0.34 | 7.7 | 3.9 | KER063 | 1 | 84 | 2.85 |
| 1/2 | SER005S | 14.5 | 10 | 15 | . | 0.6 | 16.9 | 8.5 | KER063 | 1 | 104 | 2.85 |
| 1 | SER010L | 16 | 10 | 7 | . | 0.6 | 16.9 | 8.5 | KER080 | 1 | 110 | 4.5 |
| 1 | SER010S | 17 | 10 | 14 | . | 1.2 | 23.9 | 12 | KER080 | 1 | 159 | 4.5 |
| 2 | SER020L | 22.5 | 10 | 7 | . | 1.2 | 23.9 | 12 | KER100 | 1 | 174 | 7.5 |
| 3 | SER030C | 29.5 | 10 | 3.5 | . | 1.2 | 23.9 | 12 | KER100 | 2 | 207 | 15.5 |